

Qingdao Yumetal Hardware Rigging Co., Ltd.

Suite 10H, Jinfu Mansion No.22B Shandong Road, Qingdao, China

TEL:0086-532-85805383

FAX:0086-532-85839733


Test Certificate

Order No: YMCCR2509W


CONTRACT NO.:

Purchaser:


Description of goods: DIN1480 Turnbuckle(forged)

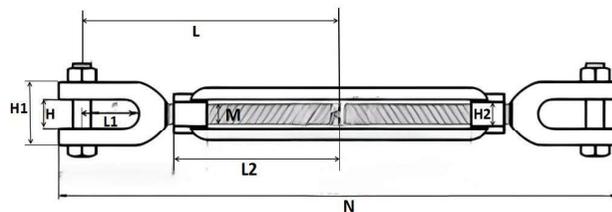

Inspection Date: Nov 5TH,2025



0.500 ± 0.1 is the pitch of the screw, see per below table



DIN1480 Turnbuckle(forged) MATERIAL: Q235 (Thickness of zinc is 5-8um) -Heavy,Jaw&Jaw										Screw for Bolt&Jaw			Screw for Jaw Body			Breaking load(N)
Size(mm)	Brasil Size	M	H	H1	H2	L	L1	L2	N	A	B	C	A	B	C	
8mm	5/16"	8.00	10.00	23.00	8.00	100.00	27.00	62.00	107.50	1.25	7.78	58.95	1.25	6.70	15.31	20500
10mm	3/8"	10.00	14.00	31.00	13.00	115.00	29.00	70.00	125.00	1.50	9.41	69.20	1.50	8.43	18.34	32500
12mm	1/2"	12.00	16.00	32.00	14.00	125.00	38.00	70.00	136.50	1.75	11.78	71.81	1.75	10.55	19.89	46500
16mm	5/8"	16.00	20.00	41.00	16.00	160.00	45.00	100.00	174.50	2.00	15.66	91.09	2.00	14.41	21.35	65000
20mm	3/4"	20.00	25.00	50.00	19.00	195.00	50.00	115.00	212.50	2.50	19.50	110.00	2.50	17.80	32.00	88500
22mm	7/8"	22.00	26.00	51.00	21.00	230.00	52.00	140.00	242.00	2.50	21.80	122.00	2.50	19.80	38.00	160000
25mm	1"	24.00	31.00	66.00	25.00	240.00	60.00	140.00	255.00	3.00	23.80	132.00	3.00	21.70	39.00	196000

Material

Chemical Composition					
MATERIAL	C(%)	Mn(%)	Si(%)	P(%)	S(%)
Q235	0.14-0.22	0.30-0.65	≤0.30	0.045	0.05

QINGDAO YUMETAL HARDWARE RIGGING CO., LTD

This is to certify that the above-mentioned products have been inspected

Inspector: Mr Jiang

Quality Check Pass:

Yu Shouhua

GENERAL MANAGER